



Professional of All Kinds of Connectors, Terminal Block and Test Probes



中文版

English

- Home
- About Us
- Products
- News
- Technology
- Quality Control
- Download
- Contact Us
- Customer Service



Range of Products >> Terminal Block >> Spring & Lighting TB >> GSL034-03P


[MORE >](#)



Catalogue

- ▶ Terminal Block**
 - ▶ Spring & Lighting Terminal block
 - ▶ Wire-Protector Terminal block
 - ▶ Screw-Clamp Terminal block
 - ▶ Pluggable Terminal block
 - ▶ Barrier Terminal block
 - ▶ Transformer Terminal block
 - ▶ Feed-through / Fuse Terminal block
 - ▶ Interface Mould Housing
 - ▶ Uk /MK Din-Rail Terminal block
 - ▶ Ws Din-Rail Terminal block
 - ▶ Ceramic & Fix Terminal block
 - ▶ Terminals & Components
- ▶ Connector**
 - ▶ D-Sub Series
 - ▶ Pin Header & Socket
 - ▶ Box Header & Ejector
 - ▶ IC socket / Sip socket / Zip socket
 - ▶ USB Connectors
 - ▶ Dip Switch Series
 - ▶ Wire / Board to board connector
 - ▶ Round Connector
- ▶ Telecommunication & Network**
 - ▶ Cables Series
 - ▶ PCB Jack
 - ▶ Keystone Jack
 - ▶ Face Plate
 - ▶ Patch adaptor & Patch cord
 - ▶ Patch Panel
 - ▶ Telephone Accessory
 - ▶ Communication Accessory
 - ▶ Tools & Tester
- ▶ Test Probes**

Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	24-12AWG	0.75-2.5mm ²
Withstanding voltage	AC2500V/1Min	
Ambient temperature	-40°C~+105°C	
Strip length	8-9mm	
Pitch	-----	
Poles	3P	
Housing	PA66+5%GF.,UL94V-0	
Pin header	Phosphor Bronze	
Wire guard	Stainless steel	

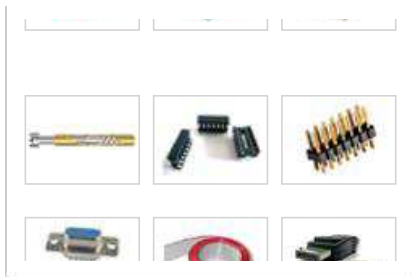

Copyright: **NINGBO GOSUN TECHNOLOGY CO.,LTD** Add: Xiaolin Industry zone, Xiaolin Town,Cixi,Ningbo,China,315321
 Tel: 0086-574-63506685 Fax: 0086-574-63989953 E-mail: gosun@gosun-tech.com / info@gosun-tech.com