



Professional of All Kinds of Connectors, Terminal Block and Test Probes



中文版

English

- Home
- About Us
- Products
- News
- Technology
- Quality Control
- Download
- Contact Us
- Customer Service



Range of Products >> Terminal Block >> Spring & Lighting TB >> GSL034-05P


[MORE >](#)



Catalogue

- Terminal Block**
 - Spring & Lighting Terminal block
 - Wire-Protector Terminal block
 - Screw-Clamp Terminal block
 - Pluggable Terminal block
 - Barrier Terminal block
 - Transformer Terminal block
 - Feed-through / Fuse Terminal block
 - Interface Mould Housing
 - UK /MK Din-Rail Terminal block
 - WS Din-Rail Terminal block
 - Ceramic & Fix Terminal block
 - Terminals & Components
- Connector**
 - D-Sub Series
 - Pin Header & Socket
 - Box Header & Ejector
 - IC socket / Sip socket / Zip socket
 - USB Connectors
 - Dip Switch Series
 - Wire / Board to board connector
 - Round Connector
- Telecommunication & Network**
 - Cables Series
 - PCB Jack
 - Keystone Jack
 - Face Plate
 - Patch adaptor & Patch cord
 - Patch Panel
 - Telephone Accessory
 - Communication Accessory
 - Tools & Tester
- Test Probes**

Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	24-12AWG	0.75-2.5mm ²
Withstanding voltage	AC2500V/1Min	
Ambient temperature	-40°C~+105°C	
Strip length	8-9mm	
Pitch	-----	
Poles	5P	
Housing	PA66+5%GF.,UL94V-0	
Pin header	Phosphor Bronze	
Wire guard	Stainless steel	

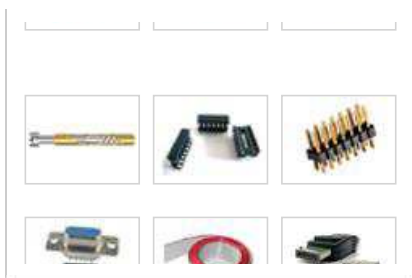

Copyright: **NINGBO GOSUN TECHNOLOGY CO.,LTD** Add: Xiaolin Industry zone, Xiaolin Town,Cixi,Ningbo,China,315321
 Tel: 0086-574-63506685 Fax: 0086-574-63989953 E-mail: gosun@gosun-tech.com / info@gosun-tech.com